


GR-Magic® mesh cable tray GRM 55



A true system innovation – made by OBO



- New definition of rapid mounting and flexibility
- Just connect the pieces – and you're done.
- GR-Magic® connection system – developed and patented by OBO.
- Can be mounted in a matter of seconds
- No need of any additional connectors or tools

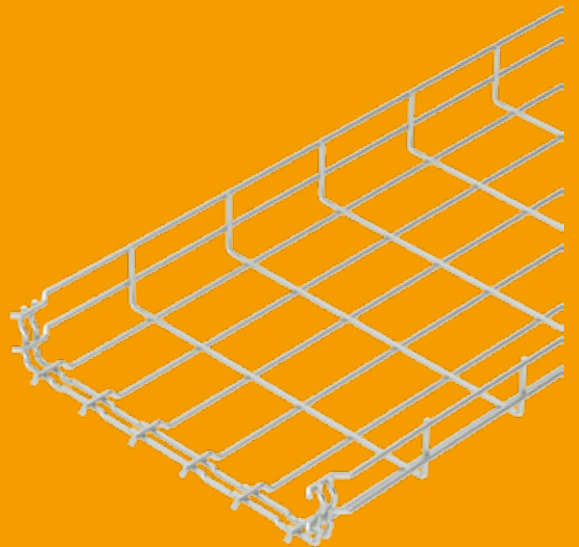


GR-Magic[®] mesh cable tray GRM 55




A true system innovation – made by OBO

Mesh cable tray with shaped connector of side height 55 mm. No additional connection components are required for the mesh cable tray, it is simply interlocked. The grid width is 50 x 100 mm (exception: GRM 55/50 = 20 x 100 mm). Magnetic shield insulation without cover 15 dB, with cover 25 dB.

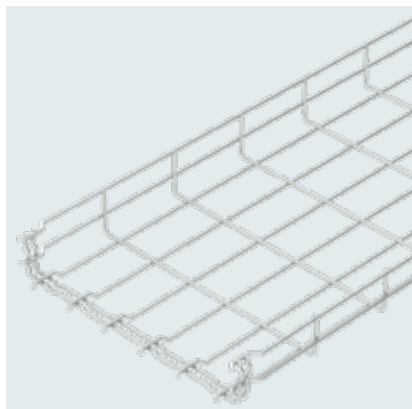

Type	Width mm	Length mm	Wire diameter mm	Dimension B	Usable cross-section cm ²	Item no.
GRM 55 50 G	50	3000	3,9	52	16	6001441
GRM 55 100 G	100	3000	3,9	100	40	6001442
GRM 55 150 G	150	3000	3,9	150	63	6001444
GRM 55 200 G	200	3000	3,9	200	87	6001446
GRM 55 200 4.8 G	200	3000	4,8	200	87	6001447
GRM 55 300 G	300	3000	4,8	300	129	6001448
GRM 55 400 G	400	3000	4,8	400	175	6001450
GRM 55 450 G	450	3000	4,8	450	195	6001451
GRM 55 500 G	500	3000	4,8	500	220	6001452
GRM 55 600 G	600	3000	4,8	600	265	6001454

St Steel **G** Electrogalvanised

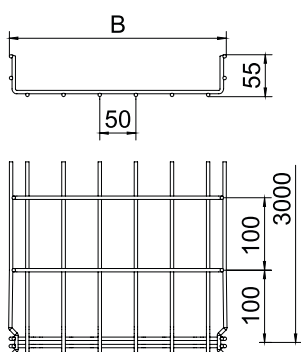

GRM 55 50 FT	50	3000	3,9	52	16	6001415
GRM 55 100 FT	100	3000	3,9	100	40	6001416
GRM 55 150 FT	150	3000	3,9	150	63	6001418
GRM 55 200 FT	200	3000	3,9	200	87	6001420
GRM 55 200 4.8FT	200	3000	4,8	200	87	6001421
GRM 55 300 FT	300	3000	4,8	300	129	6001424
GRM 55 400 FT	400	3000	4,8	400	175	6001428
GRM 55 500 FT	500	3000	4,8	500	220	6001432
GRM 55 600 FT	600	3000	4,8	600	265	6001436

St Steel **FT** Hot-dip galvanised

GRM 55 50 A2	50	3000	3,9	52	16	6001070
GRM 55 100 A2	100	3000	3,9	100	40	6001072
GRM 55 150 A2	150	3000	3,9	150	63	6001074
GRM 55 200 A2	200	3000	3,9	200	87	6001076
GRM 55 300 A2	300	3000	4,8	300	129	6001078
GRM 55 400 A2	400	3000	4,8	400	175	6001080
GRM 55 500 A2	500	3000	4,8	500	220	6001082
GRM 55 600 A2	600	3000	4,8	600	265	6001085

A2 Stainless steel, rustproof 1.4301

GRM 55 50 A4	50	3000	3,9	52	16	6001087
GRM 55 100 A4	100	3000	3,9	100	40	6001088
GRM 55 150 A4	150	3000	3,9	150	63	6001090
GRM 55 200 A4	200	3000	3,9	200	87	6001091
GRM 55 300 A4	300	3000	4,8	300	129	6001093
GRM 55 400 A4	400	3000	4,8	400	175	6001095
GRM 55 500 A4	500	3000	4,8	500	220	6001097
GRM 55 600 A4	600	3000	4,8	600	265	6001099

A4 Stainless steel, rustproof 1.4401